


RODMAN COMERCIAL DE AÇOS

www.rodmancomercial.com.br

Tel. 11 2918-3722 / 2116-1800

vendas@rodmancomercial.com.br

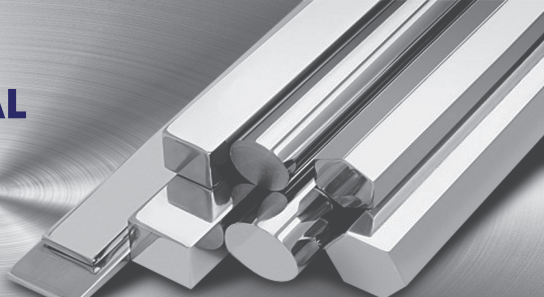

PESOS DE AÇO EM KG POR METRO LINEAR

pol.	mm	REDONDO	QUADRADO	SEXTAVADO	pol.	mm	REDONDO	QUADRADO
1/4	6,35	0,25	0,32	0,27	4	101,60	63,58	80,96
5/16	7,94	0,39	0,49	0,43	4 1/8	104,78	67,62	86,10
3/8	9,53	0,56	0,71	0,62	4 1/4	107,95	71,78	91,39
7/16	11,11	0,76	0,97	0,84	4 3/8	111,13	76,06	96,85
1/2	12,70	0,99	1,22	1,10	4 1/2	114,30	80,47	102,46
9/16	14,29	1,26	1,60	1,39	4 5/8	117,48	85,01	108,23
5/8	15,87	1,55	1,98	1,71	4 3/4	120,65	89,66	114,16
11/16	17,46	1,88	2,39	2,07	4 7/8	123,83	94,44	120,25
3/4	19,05	2,24	2,85	2,46	5	127,00	99,80	126,5
13/16	20,64	2,62	3,34	2,89	5 1/4	133,35	109,5	139,5
7/8	22,22	3,04	3,87	3,35	5 1/2	139,70	120,2	153,1
15/16	23,81	3,49	4,45	3,85	5 3/4	146,05	131,4	167,2
1	25,40	3,97	5,06	4,38	6	152,40	143,1	182,5
1 1/16	26,99	4,49	5,71	4,95	6 1/4	158,75	155,2	197,8
1 1/8	28,57	5,03	6,40	5,55	6 1/2	165,10	167,9	213,5
1 3/16	30,16	5,60	7,14	6,18	6 3/4	171,45	181,1	231,0
1 1/4	31,75	6,21	7,91	6,85	7	177,80	194,7	248,1
1 5/16	33,34	6,85	8,72	7,55	7 1/4	184,15	209,7	266,2
1 3/8	34,92	7,51	9,57	8,29	7 1/2	190,50	223,8	285,0
1 7/16	36,51	8,21	10,46	9,06	7 3/4	196,85	238,9	304,0
1 1/2	38,10	8,94	11,39	9,86	8	203,20	254,6	324,0
1 9/16	39,69	9,70	12,35	10,70	8 1/4	209,55	270,7	345,0
1 5/8	41,27	10,49	13,36	11,57	8 1/2	215,90	287,4	365,9
1 11/16	42,86	11,32	14,41	12,48	8 3/4	222,25	304,6	388,5
1 3/4	44,45	12,17	15,50	13,42	9	228,60	322,1	410,2
1 13/16	46,04	13,06	16,62	14,40	9 1/4	234,95	340,3	433,5
1 7/8	47,62	13,97	17,79	15,41	9 1/2	241,30	359,0	457,1
1 15/16	49,21	14,92	18,99	16,45	9 3/4	247,65	378,1	481,4
2	50,80	15,90	20,24	17,53	10	254,00	397,8	506,5
2 1/16	52,39	16,91	21,52	18,64	10 1/4	260,35	417,9	532,0
2 1/8	53,97	17,95	22,85	19,79	10 1/2	266,70	438,5	558,4
2 3/16	55,56	19,02	24,21	20,97	10 3/4	273,05	459,7	585,3
2 1/4	57,15	20,12	25,62	22,19	11	279,40	481,2	612,8
2 5/16	58,74	21,25	27,06	23,44	11 1/4	285,75	503,4	641,0
2 3/8	60,32	22,42	28,54	24,72	11 1/2	292,10	526,0	669,8
2 7/16	61,91	23,61	30,06	26,03	11 3/4	298,45	549,1	699,2
2 1/2	63,50	24,84	31,62	27,38	12	304,80	572,7	729,3
2 9/16	65,09	26,10	33,22	28,78	12 1/2	311,15	620,9	790,6
2 5/8	66,67	27,38	34,87	30,19	13	317,50	672,6	855,8
2 11/16	68,26	28,70	36,55	31,67	13 1/2	323,85	724,3	922,2
2 3/4	69,85	30,05	38,27	33,14	14	330,20	779,7	992,6
2 13/16	71,44	31,44	40,02	34,22	14 1/2	336,55	835,5	1063,8
2 7/8	73,02	32,85	41,82	36,22	15	342,90	894,9	1139,5
2 15/16	74,61	34,29	43,66	37,81	15 1/2	349,25	954,7	1215,6
3	76,20	35,77	45,54	39,43	16	355,60	1017,3	1295,3
3 1/8	79,38	38,81	49,41	42,79	17	361,95	1148,5	1462,3
3 1/4	82,55	41,88	53,44	46,34	18	368,30	1287,6	1639,4
3 3/8	85,73	45,27	57,63	49,98	19	374,65	1434,6	1826,6
3 1/2	88,90	48,68	61,98	53,74	20	381,00	1589,5	2023,9
3 5/8	92,08	52,22	66,49	57,66				
3 3/4	95,25	55,88	71,15	61,69				
3 7/8	98,43	60,67	75,98	65,88				

Peso específico = 7,85 kg/dm³
Aços Rápidos mais 10%